DOCUMENT FOR INCOMPLETE VEHICLE, APPLICABLE TO THE 2020 MODEL YEAR CADILLAC XTS B05 – ARMORED VEHICLE, B9Q – FUNERAL COACH, V4U – LIMOUSINE, OR W30 – SHORT STRETCH LIVERY

General Motors, Renaissance Center
P.O. Box 300
Detroit, Michigan 48265-3000
www.gm.com

DO NOT REMOVE

THIS DOCUMENT MUST REMAIN WITH THIS VEHICLE UNTIL IT IS CERTIFIED AS A COMPLETED VEHICLE

PLACE LABEL HERE

The Label affixed here includes the following information:

- the name of the incomplete vehicle manufacturer;
- the month and year the incomplete vehicle manufacturer performed its last manufacturing operation on the incomplete vehicle;
- the vehicle identification number (VIN);
- the Gross Vehicle Weight Rating (GVWR) expressed in kg (lb), intended for the vehicle when it is a completed vehicle;
- The Gross Axle Weight Rating (GAWR) expressed in kg (lb), intended for each axle of the vehicle when it is a completed vehicle, listed in order from front to rear.

This document is furnished as required by the Canada Motor Vehicle Safety Act and United States (U.S.) Federal Motor Vehicle Safety Regulations (FMVSR) to aid intermediate and final stage manufacturers in their determination of conformity of the completed vehicle with applicable Canada Motor Vehicle Safety Standards (CMVSS) and U.S. Federal Motor Vehicle Safety Standards (FMVSS). Also included are instructions which must be followed in order to assure that Environmental Protection Agency (EPA) and California Air Resources Board (CARB) emission certification requirements, U.S. National Highway Traffic Safety Administration (NHTSA) Fuel Economy Regulations and Environmental Protection Agency (EPA) Greenhouse Gas Regulations are met.

This document is not a substitute for knowledge and understanding of the requirements of the Canada Motor Vehicle Safety Act, Federal Motor Vehicle Safety Regulations (FMVSR), or applicable Canada Motor Vehicle Safety Standards (CMVSS) and Federal Motor Vehicle Safety Standards (FMVSS). Intermediate and final stage manufacturers should be familiar with the Regulations and Standards referred to above to be aware of their specific responsibilities as they relate to the final destination and sale of each incomplete vehicle.

Any intermediate or final stage manufacturer making material alterations to this incomplete vehicle during the process of manufacturing the complete vehicle should be constantly vigilant to recognize all the effects, either direct or indirect, on other components, assemblies or systems caused by any alteration. No alteration should be made to the incomplete vehicle that directly or indirectly results in any component, assembly or system being in nonconformance with any applicable Canada Motor Vehicle Safety Standard or Federal Motor Vehicle Safety Standard or Emission Regulation or Fuel Economy/Greenhouse Gas Regulation.

The statements contained in this Incomplete Vehicle Document are accurate as of the date of manufacture of the Incomplete Vehicle and can be relied on by any intermediate and/or final stage manufacturer as a basis for certification.

Printed in U.S.A. 2020 PART NO. 84682919

INTRODUCTION

This document contains information relative to conformance of this incomplete vehicle with the following:

Part I - **FEDERAL MOTOR VEHICLE SAFETY STANDARDS AND CANADA MOTOR VEHICLE SAFETY STANDARDS**

Part II - **U.S. ENVIRONMENTAL PROTECTION AGENCY, STATE OF CALIFORNIA, AND CANADIAN EMISSION REQUIREMENTS AND NHTSA FUEL ECONOMY REQUIREMENTS**

PART I

This section contains a list of Canada Motor Vehicle Safety Standards (CMVSS), and Federal Motor Vehicle Safety Standards (FMVSS), followed by a section entitled "Statements Regarding Canada Motor Vehicle Safety Standards (CMVSS), and Federal Motor Vehicle Safety Standards (FMVSS)". In the latter section, an appropriate statement of applicability is made for each standard, and by vehicle type, as it relates to the incomplete vehicle.

The identifiers TYPE 1, TYPE 2 or TYPE 3 prefix the statements (of applicability) regarding Canada Motor Vehicle Safety Standards (CMVSS), and Federal Motor Vehicle Safety Standards (FMVSS). "Examples" of these statements follow:

TYPE 1 **A statement that the vehicle when completed will conform to the standard if no alterations are made in identified components of the incomplete vehicle. EXAMPLE: This vehicle when complete will conform to CMVSS 104 and FMVSS No. 104, Windshield Wiping and Washing Systems, if no alterations are made in the windshield wiper components.**

TYPE 2 **A statement of specific conditions of final manufacture under which the manufacturer specifies that the completed vehicle will conform to the standard. EXAMPLE: This vehicle when completed will conform to CMVSS 121 and FMVSS 121, Air Brake Systems, if it does not exceed any of the gross axle weight ratings, if the center of gravity at GVWR is not higher than ## feet above the ground, and if no alterations are made to any brake system component.**

TYPE 3 **A statement that conformity with the standard cannot be determined based upon the components supplied on the incomplete vehicle, and that the incomplete vehicle manufacturer makes no representation to conformity with the standard.**

In accordance with the requirements of Canada Motor Vehicle Safety Regulations, and Federal Motor Vehicle Safety Regulations Part 568.4, the following information is included on the label affixed to the front cover of this document:

- the name of the incomplete vehicle manufacturer;
- the month and year the incomplete vehicle manufacturer performed its last manufacturing operation on the incomplete vehicle;
- the vehicle identification number (VIN);
- The Gross Vehicle Weight Rating (GVWR) expressed in kg (lb): The GVWR on the label on the cover of this document is for the incomplete vehicle itself. It is NOT the maximum GVWR of the completed vehicle and it should NOT be used on the final stage manufacturer's label. The maximum GVWR is shown in the GVWR TABLE that follows. The actual completed vehicle GVWR should be shown on the final stage manufacturer's certification label.
- The Gross Axle Weight Rating (GAWR) expressed in kg (lb): The GAWRs on the label on the cover of this document are for the incomplete vehicle. They are NOT the maximum GAWRs of the completed vehicle and they should NOT be used on the final stage manufacturer's certification label. The maximum GAWRs are shown in the GVWR/GAWR TABLE that follows. The actual completed vehicle GVWR/GAWRs should be shown on the final stage manufacturer's certification label.

DRAFT

In addition, the final stage manufacturer is responsible under Canada Motor Vehicle Safety Regulations, and Federal Motor Vehicle Safety Regulations and Part 567.5, to place the GVWR and the GAWR of each axle, on the Final Vehicle Certification Label. Required on the label is the "Gross Vehicle Weight Rating" or "GVWR" followed by the appropriate value in kilograms and (pounds), which shall not be less than the sum of the unloaded vehicle weight, rated cargo load, and 68 kg (150 lb) times the number of the vehicle's designated seating positions, if known. However, for school buses the minimum occupant weight allowance shall be 54.4 kg (120 lb) per passenger and 68 kg (150 lb) for the driver.

Unloaded Vehicle Weight means the weight of a vehicle with maximum capacity of all fluids necessary for operation of the vehicle, but without cargo, occupants or accessories that are ordinarily removed from the vehicle when they are not in use.

During the completion of this vehicle, GVWR and GAWR may be affected in various ways, including but not limited to the following:

- The installation of a body or equipment that exceeds the rated capacities of the Incomplete Vehicle.
- The addition of designated seating positions that exceed the rated capacities of the Incomplete Vehicle.
- Alterations or substitution of any components such as axles, springs, tires, wheels, frames, steering and brake systems that may affect the rated capacities of the Incomplete Vehicle.
- **For options B9Q – Funeral Coach, the incomplete vehicle is to be manufactured into a Truck. Type: Truck**
- **For options B05 – Armored Vehicle, V4U – Limousine, or W30 - Short Stretch Livery, the incomplete vehicle is to be manufactured into a Multipurpose Passenger Vehicle. Type: MPV**

GVWR/GAWR TABLE

Option	GVWR		GAWR FRT		GAWR RR	
	lb	kg	lb	kg	lb	kg
W30	6,150	2789	3,198	1450	3,198	1450
B9Q	6,885	3123	3,580	1624	3,580	1624
V4U	6,885	3123	3,580	1624	3,580	1624
B05	6,885	3123	3,580	1624	3,580	1624

If supplemental technical information is required to support this document, go to the GM Upfitter Integration website located at www.gmupfitter.com

DRAFT

PART I – CHART A

LIST OF CANADA MOTOR VEHICLE SAFETY STANDARDS (CMVSS) AND FEDERAL MOTOR VEHICLE SAFETY STANDARDS (FMVSS), APPLICABLETO THE CADILLAC XTS B05 – ARMORED VEHICLE, B9Q – FUNERAL COACH,V4U – LIMOUSINE, OR W30 – SHORT STRETCH LIVERY

SEE STATEMENTS REGARDING CMVSS AND FMVSS ON PAGES THAT FOLLOW

CMVSS NO.	FMVSS NO.	TITLE	B05 Armored Vehicle	B9Q Funeral Coach	V4U Limousine	W30 Short Stretch
1106	-	Exterior noise	1	1	1	1
ICES-002	-	Canada interference causing equipment standard	1	1	1	1
101	101	Controls and displays	1	1	1	1
102	102	Transmission shift position sequence, starter interlock and transmission braking effect	1	1	1	1
103	103	Windshield defrosting and defogging systems	1	1	1	1
104	104	Windshield wiping and washing systems	1	1	1	1
106	106	Brake hoses, hydraulic, air and vacuum	1	1	1	1
108	-	Daytime running lamps	1	1	1	1
108	108	Lamps, reflective devices and associated equipment	2	2,3	2	2
110	110	Tire selection and rims for motor vehicles with a GVWR of 4536 kg (10,000 lb) or less	2	2	2	2
111	111	Rear visibility	3	3	3	3
113	113	Hood latch system	1	1	1	1
114	114	Theft protection and rollaway prevention	1	1	1	1
115	-	Vehicle identification number	1	1	1	1
116	116	Motor vehicle brake fluids	1	1	1	1
118	118	Power operated window, partition and roof panel systems	1	1	1	1
124	124	Accelerator control systems	1	1	1	1
126	126	Electronic stability control systems	2	2	2	2
135	135	Light vehicle brake systems	2	2	2	2
-	138	Tire pressure monitoring systems	2	2	2	2
201	201	Occupant protection in interior impact	3	3	3	3
202	202A	Head restraints	1	1,3	1	1
203	203	Impact protection for the driver from the steering control system	1	1	1	1
204	204	Steering control rearward displacement	1	1	1	1
205	205	Glazing materials	1	1	1	1
206	206	Door locks and door retention components	1	3	1	1
207	207	Seating systems	1,3	1,3	1,3	1,3
208	208	Occupant crash protection	2,3	2,3	2,3	2,3
209	209	Seat belt assemblies	1,3	1,3	1,3	1,3
210	210	Seat belt assembly anchorages	1,3	1,3	1,3	1,3
210.1	-	Tether anchorages for restraint systems	1,3	1,3	1,3	1,3
210.2	-	Lower universal anchorage systems for restraint systems and booster cushions	1,3	1,3	1,3	1,3
212	212	Windshield mounting	2	2	2	2
213.4	213	Built-in child restraint systems and built-in booster cushions	3	3	3	3
214	214	Side impact protection	2	2	2	2
216	216a	Roof crush resistance	3	3	3	3
219	219	Windshield zone intrusion	2	2	2	2
220	220	School bus rollover protection	3	3	3	3
	225	Child restraint anchorage system	1,3	1,3	1,3	1,3
226	226	Ejection Mitigation	1	1	1	1
301	301	Fuel system integrity	2	3	2	2
302	302	Flammability of interior materials	1,3	1,3	1,3	1,3
401	401	Internal Trunk Release	1	3	1	1
-	403	Platform Lift Systems	3	3	3	3
-	404	Platform Lift Systems Installations in Motor Vehicles	3	3	3	3

- TYPE 1, 2 or 3 numbers to the right-hand side of the table above designate the statement TYPE(S) associated with the CMVSS and/or FMVSS standards that follow.

DRAFT

Statements Regarding Canada Motor Vehicle Safety Standards (CMVSS), and Federal Motor Vehicle Safety Standards (FMVSS)

CMVSS 1106 – EXTERIOR NOISE
Applies to all types of Incomplete Vehicles Contained in this Document

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

A. This incomplete vehicle, when completed, will conform to the above standard providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below (if equipped):

Air Induction System (tuning elements)
Alternator
Axles/halfshafts/propshaft
Components for AWD system (axle, propshaft, PTU)
Engine assembly
Exhaust System
Exterior noise generating devices
Exterior rearview mirror assemblies
Front of dash sound deadening material
Hood assembly including sound deadening material and seals
Intake system (Air Induction System (i.e. Air filter, Mass Air flow (MAF) sensor, ducts))
Power steering pump
Powertrain control and logic
Powertrain cooling fan and motor assemblies
Radiator/condenser assembly to body seals
Tires (including correct tire pressure)
Transmission/Transaxle assembly
Underbody shields including air deflector
Wheelhouse liners and shields

B. Final compliance with CMVSS 1106 is the responsibility of the final stage manufacturer for any modifications, added material, components, or systems.

INTERFERENCE CAUSING EQUIPMENT STANDARD (CANADA ONLY) – ICES-002
Applies to all types of Incomplete Vehicles Contained in this Document

TYPE 1 The following statement is applicable to all types of incomplete vehicles with spark ignition engines contained in this document (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to the performance requirements of the above standard provided no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below:

Ignition coil(s)
Ignition wires & plugs
Spark plug wires
VCM/PCM/ECM/TCM

The final stage manufacturer must provide a statement of compliance on the Final Stage Manufacturer's Compliance Label with the following bilingual information in order to comply with Industry Canada's Interference Causing Equipment Standard ICES/NMB-002:

ICES/NMB-002

DRAFT

FMVSS 101 – CONTROLS AND DISPLAYS
Applies to all types of Incomplete Vehicles Contained in this Document
CMVSS 101– CONTROLS AND DISPLAYS
Applies to all types of Incomplete Vehicles Contained in this Document with a GVWR of 4536 kg (10,000 lb) or less

TYPE 1 The following statement is applicable to all types of Incomplete Vehicles contained in this document as noted above (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 101 and FMVSS 101 providing no alterations are made which affect the size, location, identification or illumination of the controls and displays or the location, travel and type of driver's seat, as manufactured by General Motors.

The following controls must be operable, and the following displays for the following functions and shall be fitted in such a manner that they are identifiable, by the driver while the driver is seated in the driver's designated seating position with the driver's seat belt fastened around the driver in accordance with the manufacturer's instructions:

Hand operated controls (if equipped):

- Automatic vehicle speed (cruise control)
- Clearance lamps (switch)
- Clutch
- Driver's sun visor
- Engine start
- Engine stop
- Electric park brake switch
- Electronic stability control system "off"
- Hand throttle
- Hazard warning signal
- Hazard warning switch
- Headlamps
- Headlamp high or low beam switch
- Heating and air conditioning fan
- Heating and air conditioning system
- Horn
- Identification lamps (switch)Ignition (switch)
- Illumination intensity
- Manual choke
- Master lighting switch
- Position, side marker, end-outline marker, identification or clearance lamps
- Rear window defogging and defrosting systems
- Steering wheel
- Tail lamps
- Transaxle/transmission shifter (except transfer case)
- Turn signal
- Windshield defogging and defrosting systems
- Windshield washer (washing system)
- Windshield wiper (wiping system)

Foot operated controls (if equipped):

- Accelerator
- Clutch
- Headlamp high or low beam switch
- Service brake pedal
- Tail lamp
- Windshield washer (washing system)
- Windshield wiper (wiping system)

Displays (if equipped):

- Air brake low pressure
- Air bag system readiness
- Antilock brake system malfunction
- Battery charging condition
- Brake lining wear-out condition
- Brake system malfunction (Canada - ISO symbol)
- Brake Pressure (system loss)
- Electrical charge
- Electronic stability control system "off"
- Electronic stability control system malfunction
- Engine coolant temperature
- Engine oil pressure
- Fuel level
- Gross loss of brake pressure condition
- Hazard warning signal
- Headlamp high beam
- Low brake air pressure telltale
- Low brake fluid condition
- Low tire pressure indication (see MVSS 138)
- Odometer (Canada must be metric)
- Passenger air bag Status
- Parking brake applied
- Regenerative brake system malfunction
- Seat belt (unfastened telltale)
- Speedometer (Canada must be metric)
- Tire pressure monitoring system malfunction
- Transmission control position
- Turn signal(s)
- Variable brake proportioning system malfunction

DRAFT

If the intermediate or final stage manufacturer installs any of the above controls and displays, they must also meet the requirements of this standard.

CMVSS 102 and FMVSS 102 – TRANSMISSION SHIFT POSITION SEQUENCE, STARTER INTERLOCK AND TRANSMISSION BRAKING EFFECT
Applies to all types of Incomplete Vehicles Contained in this Document

TYPE 1 The following statement is applicable to all incomplete vehicle types contained in this document (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 102 and FMVSS 102 providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below (if equipped):

Automatic (AT) or Manual (MT) Transaxle/Transmission control and identification system, including but not limited to:

- AT floor shift mechanism
- AT gear ratios and final drive ratio
- AT gear shift sequence and control logic (electrical or mechanical)
- AT neutral safety switch assembly and wire
- AT position indicator linkage and display
- AT steering column assembly
- Automatic transmission/transaxle assembly
- Brake - AT interlock controls
- Engine starter interlock controls
- MT clutch-starter interlock system
- AT or MT shift position pattern (knob, plate or label)
- Vehicle wiring harnesses

CMVSS 103 and FMVSS 103 – WINDSHIELD DEFROSTING AND DEFOGGING SYSTEMS
Applies to all types of Incomplete Vehicles contained in this Document

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 103 and FMVSS 103 providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below (if equipped):

Windshield defrosting and defogging systems, including but not limited to:

- Chassis and instrument panel wiring harness assembly
- Defroster air distributor assembly (manifold)
- Defroster air duct assembly
- Defroster air hoses (distributor to nozzle)
- Defroster air to windshield outlet assembly (nozzle) (it affects blower speed)
- Defroster outlet to heater assembly adapter
- Engine control, software and calibration
- Engine coolant pump
- Engine water outlet thermostat assembly
- Engine wiring harness
- Heater and air conditioning wiring harness
- Heater and defroster assembly (including motor and blower)
- Heater and defroster control (electrical, mechanical, vacuum)
- Heater and radiator hoses/hose assemblies
- Heater blower motor speed control
- Side window defroster ducts
- Vacuum control hoses and electric actuators
- Windshield assembly

CMVSS 104 and FMVSS 104 - WINDSHIELD WIPING AND WASHING SYSTEMS
Applies to all types of Incomplete Vehicles contained in this Document

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

DRAFT

This incomplete vehicle, when completed, will conform to CMVSS 104 and FMVSS 104 providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below (if equipped):

Windshield wiping and washing systems, including but not limited to:

Vehicle wiring harness and electrical controls
Washer reservoir cap
Water reservoir filler assembly
Windshield assembly
Windshield module attachments
Windshield washer fluid reservoir
Windshield washer nozzle
Windshield washing system hoses
Windshield wiper arm assembly
Windshield wiper blade assembly
Windshield wiper linkage assembly
Windshield wiper/washer control
Windshield wiper/washer motor/pump assembly

CMVSS 106 and FMVSS 106 – BRAKE HOSES, HYDRAULIC, AIR AND VACUUM
Applies to all types of Incomplete Vehicles contained in this Document

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 106 and FMVSS 106 providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below:

Hydraulic, Air, and Vacuum Brake Hoses and assemblies
Labeling requirements

CMVSS 108 – DAYTIME RUNNING LAMPS
Applies to all types of Incomplete Vehicles contained in this Document

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

This incomplete vehicle, when completed will conform to the Daytime Running Lamps (DRL) requirements of CMVSS 108 providing no alterations are made to the ignition switch, DRL system components or wiring, and any vehicle forward lighting as manufactured by General Motors.

CMVSS 108 and FMVSS 108 – LAMPS, REFLECTIVE DEVICES AND ASSOCIATED EQUIPMENT
Applies to all types of Incomplete Vehicles contained in this Document

TYPE 2 The following statement is applicable to B05 – Armored Vehicle, B9Q – Funeral Coach front lamps, V4U – Limousine, or W30 – Short Stretch Livery types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 108 and FMVSS 108 **IF** it is completed with a body less than 203.2 cm (80 in) in width, and a GVWR of 4536 kg (10,000 lb.) or less provided the following conditions are met:

Each of these devices must be properly installed on the completed vehicle and meet all requirements of CMVSS 108 and FMVSS 108:

A. The following devices when provided, located and/or wired by General Motors meet the requirements of CMVSS 108 and FMVSS 108:

DRAFT

Back-up lamps
Body control module (BCM)
Center high mounted stop lamp
Daytime running lamps controls & wiring (Canada)
Fog lamps (if equipped)
Front side marker lamps
Front side marker reflex reflectors
Front turn signal lamps
Hazard warning flasher
Hazard warning signal operating unit
Headlamps
Headlamp dimmer switch
Headlamp high beam indicator
License plate lamp
Owner Manual instructions
Park lamps
Rear side marker lamps
Rear side reflex reflectors
Rear reflex reflectors
Rear turn signal lamps
Stop lamps
Tail lamps
Turn signal control

B. No part of the completed vehicle shall be installed to prevent any of the devices listed above from meeting their required photometric output at the specified test points. If such interference exists, the applicable devices may have to be relocated or additional devices added to meet the requirements of CMVSS 108 and FMVSS 108. Any CMVSS 108 or FMVSS 108 part shall not be painted.

C. No alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems including but not limited to those listed in A above.

TYPE 3 The following statement is applicable to the rear lamps on the B9Q - Funeral Coach incomplete vehicle type contained in this document (unless otherwise noted on the cover).

For rear lamps, rear reflex reflectors, center high mount stop lamp, license plate mounting and turn signal lamp signal failure feature, conformity with CMVSS 108 and FMVSS 108 cannot be determined based upon the components supplied on the incomplete vehicle, and General Motors makes no representation to conformity with the standard.

CMVSS 110 and FMVSS 110 – TIRE SELECTION AND RIMS FOR MOTOR VEHICLES WITH A GVWR OF 4536 kg (10,000 lb) OR LESS

Applies to all types of Incomplete Vehicles contained in this Document

TYPE 2 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 110 and FMVSS 110, providing:

A. No alterations are made which affect the function, physical or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to:

Owner Manual instructions
Tires
Wheels

B. GVWR, GAWR front and rear weight ratings as listed in the **Cadillac Master Coachbuilders (CMC) Guidelines Manual** and the Incomplete Vehicle document are not exceeded.

C. The tire and wheel information shown at the end of this document must be transferred to the final stage manufacturer's Certification Label and the Tire Information Placard, providing no equipment or tire pressure changes are made, and the final stage manufacturer labels the vehicle in compliance with CMVSS 110 and FMVSS 110.

NOTE: Incomplete Vehicles referenced in this document may be shipped with reduced tire pressures for shipping purposes only.

DRAFT

CMVSS 111 and FMVSS 111 – REAR VISIBILITY
Applies to all types of Incomplete Vehicles contained in this Document

TYPE 3 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

Conformity with CMVSS 111 and FMVSS 111 cannot be determined based upon the components supplied on the incomplete vehicle, and General Motors makes no representation to conformity with the standard**.**

CMVSS 113 and FMVSS 113 – HOOD LATCH SYSTEM
Applies to all types of Incomplete Vehicles contained in this Document

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 113 and FMVSS 113 providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below:

Hood latch systems, which may include but are not limited to:

- Hood latch (catch) assembly
- Hood latch cable release system including controls
- Hood latch pilot
- Hood latch striker plate (hook) and reinforcements
- Hood latch support assembly

CMVSS 114 and FMVSS 114 – THEFT PROTECTION AND ROLLAWAY PREVENTION
Applies to all types of Incomplete Vehicles Contained in this Document
4536 kg (10,000 lb) GVWR or less

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document, 4536 kg (10,000 lb) GVWR or less (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 114 and FMVSS 114 providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below:

- Brake-transaxle/transmission interlock controls
- Electronic Immobilizer
- Engine electronics (ECM/PCM/VCM)
- Engine starter interlock controls
- Ignition key
- Ignition key warning chime system
- Owner Manual Instructions
- Steering column lock assembly
- Transaxle/Transmission assembly
- Transaxle/Transmission assembly neutral start switch and wiring

CMVSS 115 – VEHICLE IDENTIFICATION NUMBER
Applies to all types of Incomplete Vehicles contained in this Document

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 115 providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below:

- The Vehicle Identification Number (VIN)
- VIN label or plate
- VIN plate fasteners

DRAFT

CMVSS 116 and FMVSS 116 – MOTOR VEHICLE BRAKE FLUIDS
Applies to all types of Incomplete Vehicles contained in this Document

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

The hydraulic brake fluid in this incomplete vehicle, as manufactured by General Motors, will conform to CMVSS 116 and FMVSS 116 providing no alterations are made which affect the physical or chemical properties of the brake fluid.

CMVSS 118 and FMVSS 118 – POWER OPERATED WINDOW, PARTITION AND ROOF PANEL SYSTEMS
Applies to all types of Incomplete Vehicles Contained in this Document
4536 kg (10,000 lb) GVWR or less

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document, 4536 (10,000 lb) GVWR or less (unless otherwise noted on the cover).

This incomplete vehicle, if equipped by General Motors with power windows, when completed, will conform to CMVSS 118 and FMVSS 118 providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below (if equipped):

- Power window electrical system
- Power window operating system
- Power window operating system control logic
- Sunroof operating system
- Sunroof electrical system
- Window glazing material

Final compliance with CMVSS 118 and FMVSS 118 is the responsibility of the final stage manufacturer for any modifications, or added material, components, or systems.

CMVSS 124 and FMVSS 124 – ACCELERATOR CONTROL SYSTEMS
Applies to all types of Incomplete Vehicles contained in this Document

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 124 and FMVSS 124 providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below:

Accelerator/throttle control systems, including but not limited to:

- Attachment pin, hole or ball stud to fuel injection unit throttle lever
- Cable or rod, throttle or accelerator, and support bracket including seals
- Cruise control module, wiring and cable (if equipped)
- Electronic throttle control assembly and related wiring
- Floor covering material must not be installed under pedal or within 25.4 mm (1 in) of side of pedal
- Lever, throttle or accelerator and supporting bracket
- Pedal-throttle or accelerator and attachments
- Spring(s) - throttle or accelerator return

CMVSS 126 and FMVSS 126 – ELECTRONIC STABILITY CONTROL SYSTEMS
Applies to all types of Incomplete Vehicles Contained in this Document
4536 kg (10,000 lb) GVWR or less

DRAFT

TYPE 2 The following statement is applicable to all types of incomplete vehicles contained in this document, 4536 kg (10,000 lb) GVWR or less (unless otherwise noted on the cover).

This incomplete vehicle when completed will conform to CMVSS 126 and FMVSS 126 provided it is completed in accordance with the following specific conditions by the (intermediate and) final stage manufacturer:

A. Providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below:

- Anti-Lock Brake, Traction Control and Electronic Stability control system, including sensors and control module
- Brake assemblies and components (service/ parking) - (i.e. power boosters, master cylinder, wheel cylinder, calipers, rotors, wheel speed sensor, wheel speed sensor wiring, brake lining etc.)
- Brake pedal, brake switch, parking brake hand lever or park brake switch and related mechanical components
- Brake system electrical controls and logic
- Gauges and warning devices, and statements
- Hydraulic brake fluid and reservoirs
- Hydraulic brake lines, fittings and routings
- Hydraulic brake valves and components
- Master cylinder-warning statement
- Owner Manual instructions
- Parking brake actuator and related mechanical components
- Power steering or vacuum lines and routing
- Power steering or vacuum pump
- Tires and Wheels
- Stability control system, including control module, sensors and software calibrations
- Steering control system including related hardware
- Suspension components (i.e. bushings, control arms, shocks, springs, sway bars)
- Vacuum brake lines, fittings and routings
- Vehicle wiring harnesses

B. The GVWR, GAWR front and rear weight ratings as listed **in the Cadillac Master Coachbuilders (CMC) Guidelines Manual and the Incomplete Vehicle document** must not be exceeded.

C. The Tire Pressures as listed **in the Cadillac Master Coachbuilders (CMC) Guidelines Manual and the Incomplete Vehicle document** must be followed

D. The Maximum Allowable Curb Weight kg (lb) (no passengers) of the completed vehicle cannot exceed the restrictions as shown in the table below:

E. The maximum vertical Center of Gravity (CG) of the completed vehicle cannot exceed the Maximum "Z - Vertical CG Height Restriction Values" at the corresponding "Y - Lateral Center of Gravity Locations" as shown in the table below:

DRAFT

Cadillac XTS, RGS - 235/55R18XL Continental ContiPro Contact Tire CMVSS 126 and FMVSS 126 Compliance Certification "X = Longitudinal, Y = Lateral and Z = Vertical Center of Gravity (CG) Restrictions"							
Model Identification	**Completed Vehicle Wheelbase in mm (in)**	**Maximum Allowable Completed Vehicle Curb Weight kg (lb) (no passengers)**	**Front/Rear Tire Pressures in kpa (psi)**	**@ X – allowable Longitudinal location (determined by weighing completed vehicle)**	**@ Y – Lateral CG Offset Location mm (in)**		
					-50 (-1.97)	0 (0)	50 (1.97)
V4U	3294 (129.7) - 4615 (181.7)	2699 (5,950)	290 (42) / 290 (42)	% front axle weight restricted to range from 50 to 60%	675 (26.5)	700 (27.6)	675 (26.5)
B9Q	3751 (147.7) - 4107 (161.7)	2699 (5,950)	290 (42) / 290 (42)	% front axle weight restricted to range from 50 to 60%	675 (26.5)	700 (27.6)	675 (26.5)
W30	2964 (116.7) - 3015 (118.7)	2351 (5,185)	250 (36) / 250 (36)	% front axle weight restricted to range from 50 to 60%	625 (24.6)	650 (25.6)	625 (24.6)
B05	2837 (111.7), OR 2964 (116.7) - 3015 (118.7)	2699 (5,950)	290 (42) / 290 (42)	% front axle weight restricted to range from 50 to 60%	625 (24.6)	650 (25.6)	625 (24.6)
					^^^ Maximum Z - Vertical CG Height Restriction Values ^^^		

Note: Regarding the table above "The Maximum Z – Vertical CG Height Restriction Values" are reduced by 1mm (0.039 in.) for every 2mm (0.079 in.) of " @ Y – Lateral CG Offset … " A V4U example follows: a Y – Lateral offset of +/-10 mm (0.394 in.) equals a Z – Vertical restriction of 695 mm (27.36 in.)

F. The lateral, longitudinal and vertical vehicle center of gravity locations can be approximated by following the three (3) formulas shown below:

DRAFT

Lateral Center of Gravity from Center Line of Vehicle Determination

1. Position the vehicle such that all four wheels are resting in the center of the weight scales on a hard and flat horizontal surface as shown.

2. Record the weight at all four corners.

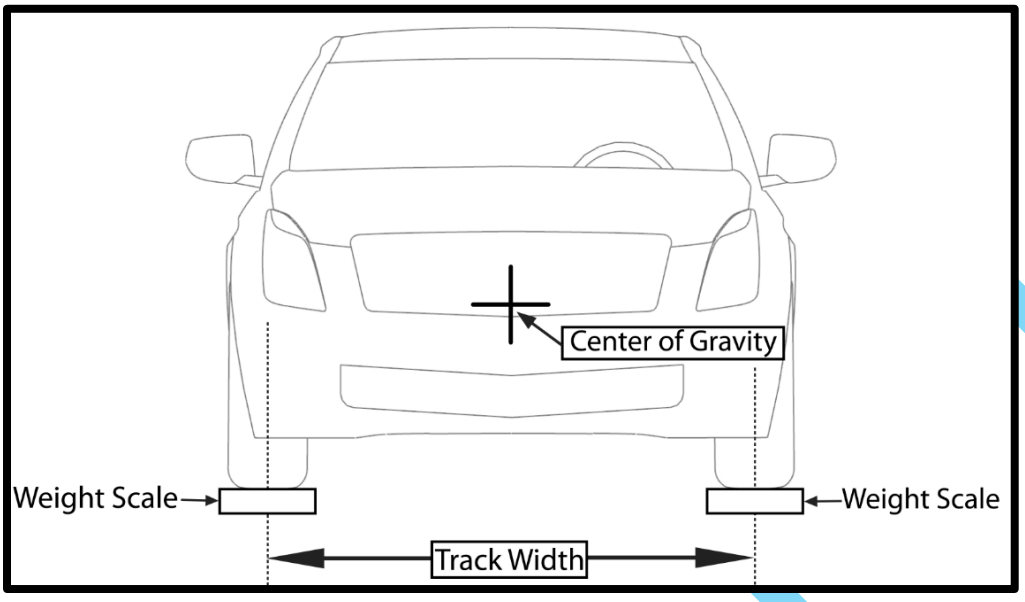

3. For all types of incomplete vehicles contained in this document with an average front track of 1587 mm (62.47 in), the **lateral** center of gravity location is determined by:

$$\frac{\text{Track Width}}{2} - \frac{\text{Track Width} \times (W_{RF} + W_{RR})}{W_T} = {}^{C_L}cg$$

Where:

W_T = Total vehicle weight = $W_{LF} + W_{RF} + W_{LR} + W_{RR}$
W_{LR} = Weight at left rear wheel kg (lb)
W_{RR} = Weight at right rear wheel kg (lb)
W_{LF} = Weight at left front wheel kg (lb)
W_{RF} = Weight at right front wheel kg (lb)

Longitudinal Center of Gravity from Center Line of Vehicle Determination

1. Position the vehicle such that all four wheels are resting in the center of the weight scales on a hard and flat horizontal surface as shown.

2. Record the weight at all four corners.

DRAFT

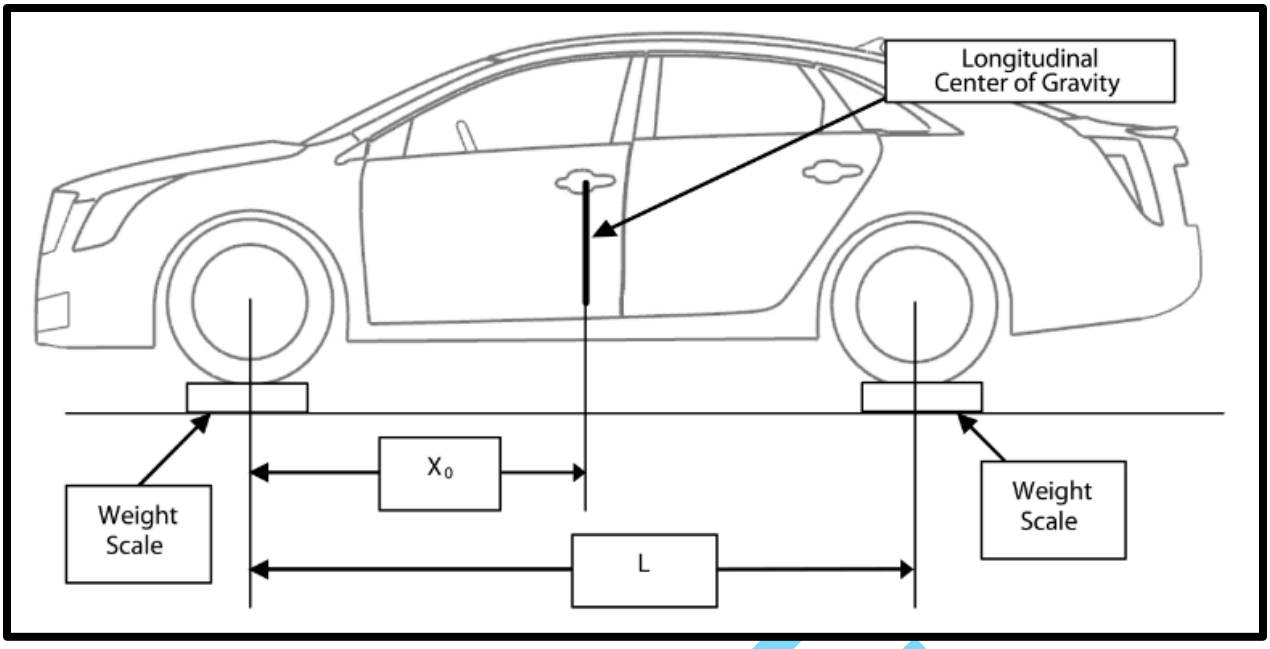

3. The **longitudinal** center of gravity location, X_0, is determined by:

$$X_0 = (L) \times (W_R/W_T)$$

Where:

X_0 = Longitudinal center of gravity from front wheel center line mm (in)
L = Vehicle wheelbase mm (in)
W_R = Rear axle weight = $W_{LR} + W_{RR}$
W_T = Total vehicle weight = $W_{LF} + W_{RF} + W_{LR} + W_{RR}$
W_{LR} = Weight at left rear wheel kg (lb)
W_{RR} = Weight at right rear wheel kg (lb)
W_{LF} = Weight at left front wheel (kg (lb)
W_{RF} = Weight at right front wheel kg (lb)

Vertical Center of Gravity Determination

1. Position the vehicle with the front tires raised to an incline of at least 20°, as shown below. An overhead or floor hoist is recommended to elevate the front of the vehicle. It must be able to support the weight of the vehicle and be structurally stable. Weight scales are needed under the rear tires only and must be horizontal so that true vertical weight is measured. The rear weight scales must be elevated approximately 381 mm (15 in) to provide sufficient ground clearance to the rear bumper and tail pipe.

2. Record the weight readings of the rear scales.

DRAFT

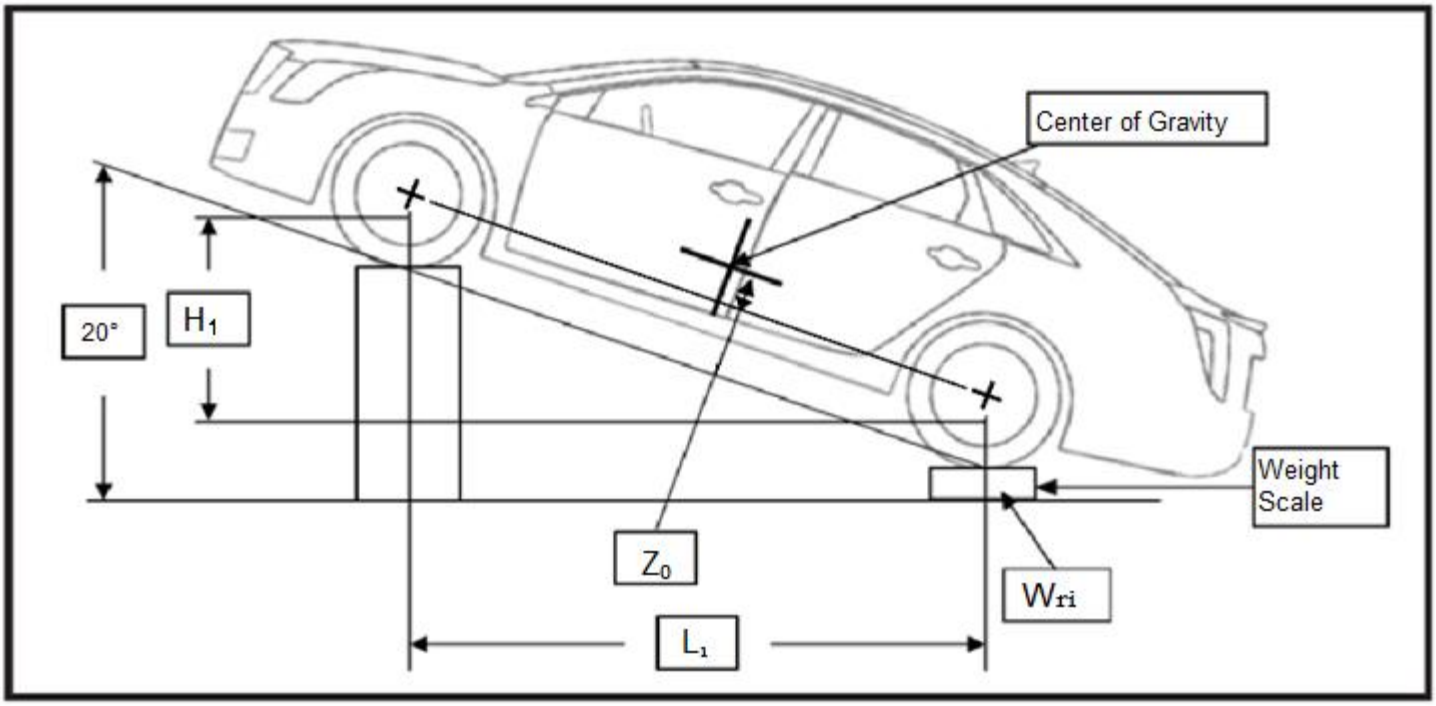

3. The **vertical** center of gravity location Z_0 is determined by:

$$Z_0 = (L_1/H_1) \times (L*W_{RI}/W_T - X_0)$$

Where:

L_1 = Horizontal distance between front and rear wheels on incline mm (in)
H_1 = Vertical distance between front and rear wheels on incline mm (in)
L = Vehicle wheelbase mm (in)
W_{RI} = Rear axle weight on incline = $WL_{RI} + WR_{RI}$
WL_{RI} = Left rear weight on incline kg (lb)
WR_{RI} = Right rear weight on incline kg (lb)
W_T = Total vehicle weight (as previously determined)
X_0 = Longitudinal center of gravity location (as previously determined)

DRAFT

CMVSS 135 and FMVSS 135 – LIGHT VEHICLE BRAKE SYSTEMS

Applies to all types of Incomplete Vehicles Contained in this Document with a 3500 kg (7,716 lb) GVWR or less

TYPE 2 The following statement is applicable to all types of incomplete vehicles contained in this document with a 3500 kg (7,716 lb) GVWR or less (unless otherwise noted on the cover).

This incomplete vehicle when completed will conform to CMVSS 135 and FMVSS 135 provided the intermediate or final stage manufacturer complete it in accordance with the following specific conditions:

A. Provided no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems including but not limited to those listed below:

Anti-Lock Brake System
Brake assemblies and components (service/parking) (i.e. power boosters, master cylinder, wheel cylinder, calipers, rotors, wheel speed sensor, wheel speed, sensor wiring, brake lining etc.)
Brake pedal, brake switch, parking brake hand lever or park brake switch and related mechanical components
Brake system electrical controls and logic
Gauges and warning devices, and statements
Hydraulic brake fluid and reservoirs
Hydraulic brake lines, fittings and routings
Hydraulic brake valves and components
Master cylinder-warning statement
Owner Manual instructions
Parking brake actuator and related mechanical components
Power steering or vacuum lines and routing
Power steering or vacuum pump
Tires and Wheels
Vacuum brake lines, fittings and routings
Vehicle wiring harnesses

B. The percent front weight at GVWR and percent front weight in CMVSS 135 and FMVSS 135 lightly loaded condition are met as tabulated below per completed vehicle wheel base and vehicle type. NOTE: The wheelbase as shipped from General Motors is 2837 mm (111.7 in).

CMVSS 135 and FMVSS 135 BRAKE TABLE

Completed Vehicle Wheelbase		Vehicle Type	Percent of Front Weight at GVWR (percent)	Percent of Front Weight in Standard 135 Lightly Loaded Condition (percent)
mm	inches			
2837 OR 2964 - 3015	111.7 OR 116.7 - 118.7	B05	48.0 - 52.0	53.8 - 58.0
2964 - 3015	116.7 - 118.7	W30	48.0 - 52.0	53.8 - 58.0
3294 - 4615	129.7 - 181.7	V4U	48.0 - 52.0	53.8 - 58.0
3751 - 4107	147.7 - 161.7	B9Q	48.0 - 52.0	53.8 - 58.0

C. The completed vehicle wheelbase does not exceed the maximum completed vehicle wheelbase as noted in the CMVSS 135 and FMVSS 135 BRAKE TABLE above.

D. The GVWR, GAWR front and rear weight ratings as listed on the Incomplete Vehicle Label affixed to the front cover of this document must not be exceeded.

E. The maximum vertical center of gravity cannot exceed the Z = Vertical Center of Gravity (CG) Restrictions at the 0 mm (in) Y – Lateral CG Offset Location shown in the "… CMVSS 126 and FMVSS 126 Compliance Certification … Restrictions," table.

DRAFT

FMVSS 138 – TIRE PRESSURE MONITORING SYSTEM (If Equipped)
Applies to all types of Incomplete Vehicles Contained in this Document with a 4536 kg (10,000 lb) GVWR or less

TYPE 2 The following statement is applicable to all types of incomplete vehicles contained in this document with a 4536 kg (10,000 lb) GVWR or less (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to FMVSS 138, providing the vehicle is equipped with a Tire Pressure Monitoring System (TPMS) installed by General Motors, and no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems including but not limited to those listed below:

Body control module
Instrument panel cluster
Owner Manual Instructions
Remote start coax antennae (if equipped)
Tires and Wheels
TPMS receiver module
TPMS sensors integral to the valve stems
Vehicle wiring harness

All incomplete vehicles shipped from the General Motors assembly plant may have tire pressures set for shipping purposes only. It is the responsibility of the final stage manufacturer to label the vehicle in compliance to FMVSS 138. In addition, it is the responsibility of the final stage manufacturer to ensure the TPMS system is calibrated to the values printed on the final stage manufacturer's Tire Certification Label or Tire Information Label.

Wheelbase alteration, and/or addition of components may interfere with the TPMS radio frequency signal that may result in a malfunction warning displayed in the Driver Information Center (DIC). If this condition is observed, **go to the GM Upfitter Integration website located at www.gmupfitter.com**

NOTE: The TPMS is not required to monitor the spare tire, either when it is stowed or when it is installed on the vehicle.

CMVSS 201 and FMVSS 201 – OCCUPANT PROTECTION IN INTERIOR IMPACTS
Applies to all types of Incomplete Vehicles Contained in this Document with a 4536 kg (10,000 lb) GVWR or less

TYPE 3 The following statement is applicable to all types of incomplete vehicles contained in this document, with a 4536 kg (10,000 lb) GVWR or less (unless otherwise noted on the cover).

Conformity with CMVSS 201 and FMVSS 201 cannot be determined based upon the components supplied on the incomplete vehicle, and General Motors makes no representation to conformity with the standard.

CMVSS 202 and FMVSS 202A – HEAD RESTRAINTS
Applies to all types of Incomplete Vehicles Contained in this Document 4536 kg (10,000 lb) GVWR or less

TYPE 1 The following statement is applicable ALL seating positions in the B05 – Armored Vehicle, V4U – Limousine, or W30 – Short Stretch Livery types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 202 and FMVSS 202A providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below

Seat assemblies equipped with head restraints
Owner Manual instructions

TYPE 1 The following statement is applicable to FRONT seating positions in the B9Q - Funeral Coach incomplete vehicle type contained in this document (unless otherwise noted on the cover).

DRAFT

This incomplete vehicle, when completed, will conform to CMVSS 202 and FMVSS 202A providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below

Seat assemblies including head restraints
Owner Manual instructions

TYPE 3 The following statement is applicable to REAR seating positions in the B9Q - Funeral Coach incomplete vehicle type contained in this document (unless otherwise noted on the cover).

Conformity with CMVSS 202 and FMVSS 202A cannot be determined based upon the components supplied on the incomplete vehicle, and General Motors makes no representation to conformity with the standard.

NOTE: If the intermediate or final stage manufacturer adds or modifies seats as manufactured by General Motors, they are also responsible to provide an addendum to the Owner Manual in order to meet CMVSS 202 and FMVSS 202A requirements.

CMVSS 203 and FMVSS 203 – IMPACT PROTECTION FOR THE DRIVER FROM THE STEERING CONTROL SYSTEM
Applies to all types of Incomplete Vehicles Contained in this Document with a 4536 kg (10,000 lb) GVWR or less

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 203 and FMVSS 203 provided the Maximum Completed Vehicle Curb Weight shown in the FUEL ECONOMY AND EMISSIONS TABLE located within section PART II found later in this document are not exceeded, and no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems including but not limited to those listed below:

Driver's seat assembly
Instrument panel
Steering control system including related hardware
Steering wheel, column, and shaft

CMVSS 204 and FMVSS 204 – STEERING CONTROL REARWARD DISPLACEMENT
Applies to all types of Incomplete Vehicles Contained in this Document with a 4536 kg (10,000 lb) GVWR or less and an unloaded vehicle weight of 2495 kg (5,500 lb) or less

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover), with a 4536 kg (10,000 lb) GVWR or less and an unloaded vehicle weight of 2495 kg (5,500 lb) or less (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 204 and FMVSS 204 provided the applicable maximum GVWR and GAWR's that appear **in the Cadillac Master Coachbuilders (CMC) Guidelines Manual and the Incomplete Vehicle document** are not exceeded, and no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems including but not limited to those listed below that would affect the steering control system displacement in a 48 kph (30 mph) fixed barrier impact:

Front impact bar assembly and mounting system
Hood and hinge assemblies
Powertrain and powertrain mounting system
Steering control system including related hardware
Steering wheel, column, and shaft assembly
Tires and wheels
Vehicle/body front-end sheet metal components
Vehicle/body front-end structural components
Vehicle/body roof structure and components

DRAFT

CMVSS 205 and FMVSS 205 – GLAZING MATERIALS
Applies to all types of Incomplete Vehicles contained in this Document

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 205 and FMVSS 205 providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below:

- Glazing material
- Monogram
- Visibility of the monogram
- Windshield shade banding

Final compliance with CMVSS 205 and FMVSS 205 is the responsibility of the final stage manufacturer for any modifications, or added material, parts, components, or systems.

CMVSS 206 and FMVSS 206 – DOOR LOCKS AND DOOR RETENTION COMPONENTS
Applies to all types of Incomplete Vehicles contained in this Document with a 4536 kg (10,000 lb) GVWR or less

TYPE 1 The following statement is applicable to B05 – Armored Vehicle, V4U – Limousine, or W30 – Short Stretch Livery types of incomplete vehicles contained in this document, with a 4536 kg (10,000 lb) GVWR or less (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 206 and FMVSS 206 provided no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems including but not limited to those listed below:

Door and pillar systems, including but not limited to:

- Body rear end upper and lower panel
- Door hinges
- Door latch strikers and striker plates
- Door latches
- Door locks
- Door pillars
- Door wedges
- Doors
- Exterior door handles
- Inside lock control linkages
- Rear compartment latch and striker assembly
- Rear compartment lid assembly
- Rear compartment lid hinge assembly

Final compliance with CMVSS 206 and FMVSS 206 is the responsibility of the final stage manufacturer for any modifications, or added material, parts, components, or systems.

TYPE 3 The following statement is applicable to the B9Q - Funeral Coach incomplete vehicle type contained in this document (unless otherwise noted on the cover).

Conformity with CMVSS 206 and FMVSS 206 cannot be determined based upon the components supplied on the incomplete vehicle, and General Motors makes no representation to conformity with the standard.

CMVSS 207 and FMVSS 207 – SEATING SYSTEMS
Applies to all types of Incomplete Vehicles Contained in this Document

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 207 and FMVSS 207 providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment,

DRAFT

location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below:

Floor pan assemblies	Seat assembly
Folding seat or seat back latch assembly	Seat or seat back latch assembly
Seat adjuster assembly	Seat or seat back latch release control
Seat anchorage brackets, reinforcements, attachment hardware, etc.	Seat or seat back latch striker
	Seat riser

Final compliance with CMVSS 207 and FMVSS 207 is the responsibility of the final stage manufacturer for any modifications, or added material, parts, components, or systems.

TYPE 3 The following statement is applicable to any type of incomplete vehicle contained in this document, with any seat delete option that is applicable to any seating position (unless otherwise noted on the cover).

Conformity with CMVSS 207 and FMVSS 207 cannot be determined based upon the components supplied on the incomplete vehicle, and General Motors makes no representation to conformity with the standard**.**

CMVSS 208 and FMVSS 208 – OCCUPANT CRASH PROTECTION
Applies to all types of Incomplete Vehicles Contained in this Document with a 3856 kg (8,500 lb) GVWR or less and an unloaded vehicle weight of 2495 kg (5,500 lb) or less

TYPE 2 The following statement is applicable to all seating positions in all types of incomplete vehicles contained in this document with the General Motors allowable unloaded vehicle weight of 2495 kg (5,500 lb) or less and a GVWR of 3856kg (8,500 lb) or less (unless otherwise noted on the cover).

A. The front seating positions provided by General Motors will conform to the requirements of CMVSS 208 and FMVSS 208, providing the "Vehicle Test Weight" specified in the table that appears in section Part II toward the end of this document is not exceeded, and no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems including but not limited to those listed below:

1. The number, location or configuration of the designated seating positions.

2. The number, placement, installation or model number of the seat belt assemblies provided.

3. The owner manual instructions, the instrument panel or its mounting, the steering column/shaft or its mounting, the knee bag or its mounting, the steering wheel, horn pad, driver air bag module or its mounting and covering, passenger airbag module or its mounting or covering (if equipped), air bag crash sensors. **Note: For the "Passenger Sensing System" (if equipped), modifying or putting a padded cover on the passenger seat can affect the performance of this system.**

4. Sensor Diagnostic Module (SDM) and all air bag system wiring. Do not relocate or move the SDM, or airbag crash sensors. Do not obstruct the path of air bag deployment. Do not mount any components that produce more than a 20 Gauss magnetic field as measured at the SDM. Speakers/*magnets* must be located at least 12.7 cm (5 in) from the SDM. You must disconnect the SDM before doing any welding on the vehicle, otherwise do not disconnect the SDM. **Caution: To help avoid Personal Injury Due to unwanted air bag inflation, observe the following precautions!** Do not weld, solder, braze, hammer, machine, drill, heat, electrical splice, add onto, remove, relocate, test, paint, loosen or in any way alter air bag components or wiring or fuses. Carpet may be put over the SDM if an appropriate moisture barrier (such as a rubber-matted backing) is supplied. When performing any operation around air bag components or wiring, including but not limited to any operations around the instrument panel, electrical wiring and fuse block, steering column/wheel, and the engine compartment, you must disable the air bag system prior to the operation. If the vehicle is equipped with an SDM, you must disable the air bag system prior to installing intermediate or final stage manufacturer components. *Note: Striking or dropping a powered SDM may cause air bag deployment.* The air bag system must be enabled after operation

DRAFT

completion. This must be verified before shipping the vehicle. Instructions for disabling and enabling the air bag system can be found in the GM service manual. **Note: All connectors that have wiring routed between the SDM and an air bag inflator module have yellow connectors.**

5. If the sun visor is removed or altered, or if the intermediate or final stage manufacturer installs the sun visor, a new Inflatable Restraints System Caution label must be installed per CMVSS 208 and FMVSS 208 requirements. In order to be in compliance with CMVSS 208 and FMVSS 208 no other label shall be installed on the same side of the sun visor as the Air Bag Caution label. The instrument panel temporary warning label must not be removed.

6. The vehicle frame, front bumper system, front sheet metal or other front structure, roof structure, doors, floor pan, dash panel, cowl structure, driveline or contents of the engine compartment by any incomplete or final stage manufacturer which would result in any difference from the modified vehicle's deceleration if the modified vehicle were to be subjected to barrier impact tests conducted per CMVSS 208 and FMVSS 208.

B. The rear seating positions provided by General Motors will conform to CMVSS 208 and FMVSS 208 providing no alterations are made to the number, location or configuration of the designated seats/seating positions or to the number, placement, installation or model number of the seat belt assemblies of this incomplete vehicle.

1. Intermediate or final stage manufacturers are advised that mounting hardware ahead of the bumper/radiator, such as, but not limited to, plows, winches, brush guards, etc., may affect airbag sensing and resultant performance.

TYPE 3 The following statement is applicable to all types of incomplete vehicles contained in this document with respect to any seats, seat belt assemblies or seat belt assembly anchorages installed by the intermediate or final stage manufacturer (unless otherwise noted on the cover).

Conformity with CMVSS 208 and FMVSS 208 cannot be determined based upon the components supplied on the incomplete vehicle, and General Motors makes no representation to conformity with the standard**.**

CMVSS 209 and FMVSS 209 – SEAT BELT ASSEMBLIES
Applies to all types of Incomplete Vehicles Contained in this Document

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

The seat belt assembly provided by General Motors when mounted to its original attachments locations at any designated seating position, will conform to CMVSS 209 and FMVSS 209 providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below:

Owner Manual instructions
Seat anchorages
Seat assemblies
Seat belt anchorages
Seat belt assemblies

TYPE 3 The following statement is applicable to all types of incomplete vehicles contained in this document with respect to any seats, seat belt assemblies or seat belt assembly anchorages installed by the intermediate or final stage manufacturer (unless otherwise noted on the cover).

Conformity with CMVSS 209 and FMVSS 209 cannot be determined based upon the components supplied on the incomplete vehicle, and General Motors makes no representation to conformity with the standard**.**

CMVSS 210 and FMVSS 210 – SEAT BELT ASSEMBLY ANCHORAGES
Applies to all types of Incomplete Vehicles Contained in this Document

DRAFT

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 210 and FMVSS 210 providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below:

- B, C, and D-pillar structures
- Child restraint system including lower and top tether anchorages, seat brackets, plates and reinforcements
- Floor pan assembly
- Owner Manual instructions
- Roof structure
- Seat assemblies
- Seat belt assemblies
- Seat belt anchorage brackets, plates, and reinforcements
- Seat belt routing
- Seat position/adjustment capability

TYPE 3 The following statement is applicable to all types of incomplete vehicles contained in this document with respect to any seats, seat belt assemblies or seat belt assembly anchorages installed by the intermediate or final stage manufacturer (unless otherwise noted on the cover).

Conformity with CMVSS 210 and FMVSS 210 cannot be determined based upon the components supplied on the incomplete vehicle, and General Motors makes no representation to conformity with the standard**.**

CMVSS 210.1 – TETHER ANCHORAGES FOR RESTRAINT SYSTEMS
Applies to all types of Incomplete Vehicles Contained in this Document to be completed as a Multipurpose Passenger Vehicle or Truck with a 3856 kg (8,500 lb) GVWR or less and an Unloaded Vehicle Weight of 2495 kg (5,500 lb) or less

TYPE 1 The following statement is applicable to all multipurpose passenger vehicle or truck types of incomplete vehicles contained in this document with a 3856 kg (8,500 lb) GVWR or less and an Unloaded Vehicle Weight of 2495 kg (5,500 lb) or less (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 210.1 provided the original equipment seats are not replaced, no seating positions are removed or added, and no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below:

- Child restraint system including lower and top tether anchorages, seat brackets, plates and reinforcements
- Access to lower anchorage system
- Floor pan assembly
- Labeling requirements
- Head restraints/head rests
- Owner Manual instructions
- Seat assemblies
- Seat belt assemblies
- Seat belt anchorage brackets, plates, and reinforcements
- Seat belt routing
- Seat position/adjustment capability

TYPE 3 The following statement is applicable to all types of incomplete vehicles contained in this document with respect to any seats, seat belt assemblies or seat belt assembly anchorages installed by the intermediate or final stage manufacturer (unless otherwise noted on the cover).

Conformity with CMVSS 210.1 cannot be determined based upon the components supplied on the incomplete vehicle, and General Motors makes no representation to conformity with the standard.

CMVSS 210.2 – LOWER UNIVERSAL ANCHORAGE SYSTEMS FOR RESTRAINT SYSTEMS AND BOOSTER CUSHIONS
Applies to all types of Incomplete Vehicles Contained in this Document with a 3856 kg (8,500 lb) GVWR or less and an Unloaded Vehicle Weight of 2495 kg (5,500 lb) or less

DRAFT

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 210.2 provided the original equipment seats are not replaced, no seating positions are removed or added, and no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below:

- Child restraint system including lower and top tether anchorages, seat brackets, plates and reinforcements
- Access to lower anchorage system
- Floor pan assembly
- Head restraints/head rests
- Labeling requirements
- Owner Manual instructions
- Seat assemblies
- Seat belt assemblies
- Seat belt anchorage brackets, plates, and reinforcements
- Seat belt routing
- Seat position/adjustment capability

TYPE 3 The following statement is applicable to all types of incomplete vehicles contained in this document with respect to any seats, seat belt assemblies or seat belt assembly anchorages installed by the intermediate or final stage manufacturer (unless otherwise noted on the cover).

Conformity with CMVSS 210.2 cannot be determined based upon the components supplied on the incomplete vehicle, and General Motors makes no representation to conformity with the standard**.**

CMVSS 212 and FMVSS 212 – WINDSHIELD MOUNTING
Applies to all types of Incomplete Vehicles Contained in this Document

TYPE 2 The following statement is applicable to all types of incomplete vehicles contained in this document with a 4536 kg (10,000 lb) GVWR or less (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 212 and FMVSS 212 if no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems including but not limited to those listed below:

- Air bag crash sensors
- Air bag system including covers and module
- Air bag system wiring harnesses, connectors, and fuses/relays
- Dash panel and cowl assembly
- Doors and hinge assemblies
- Frame assembly and mounting system
- Front impact bar assembly and mounting system
- Hood and hinge assemblies
- Powertrain and powertrain mounting system
- Seat anchorages
- Seat assemblies
- Seat belt anchorages
- Seat belt assemblies
- Sensor Diagnostic Module (SDM) and retainers/brackets
- Steering control system including related hardware
- Steering wheel, column, and shaft assembly
- Sun visor assemblies
- Vehicle/body front sheet metal components/reinforcements
- Vehicle/body front structural components/reinforcements
- Vehicle/body roof structure and components
- Windshield and windshield mounting system
- Windshield frame/frame reinforcement

During a 48 kph (30 mph) frontal barrier impact test, no component installed by any intermediate or final stage manufacturer shall move forward from its permanently mounted position.

CMVSS 213.4 and FMVSS 213 – BUILT-IN CHILD RESTRAINT SYSTEMS AND BUILT-IN BOOSTER CUSHIONS
Applies to all types of Incomplete Vehicles contained in this Document

DRAFT

TYPE 3 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

Conformity with CMVSS 213.4 and FMVSS 213 cannot be determined based upon the components supplied on the incomplete vehicle, and General Motors makes no representation to conformity with the standard.

CMVSS 214 and FMVSS 214 – SIDE IMPACT PROTECTION
Applies to all types of Incomplete Vehicles contained in this Document
4536 kg (10,000 lb) GVWR or less – Static
4536 kg (10,000 lb) GVWR or less – Dynamic (Oblique Vehicle to Pole Impact)
2722 kg (6,000 lb) GVWR or less – Dynamic (Side Moving Deformable Barrier)

TYPE 2 The following statement is applicable to all types of incomplete vehicles contained in this document with the General Motors allowable unloaded vehicle weight of 2400 kg (5,290 lb) or less (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 214 and FMVSS 214, provided the General Motors supplied Tunnel Brace and Fasteners are installed per the directions in the **Cadillac Master Coachbuilders Guidelines Manual** and the applicable maximum GVWR and GAWR's are not exceeded, and no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems including but not limited to those listed below:

Air bag crash sensors
Air bag system including covers and module
Air bag system wiring harnesses, connectors, and fuses/relays
Body roof structure and components
Body sheet metal components/reinforcements
Door assemblies
Door hinges
Door latch mechanisms
Door latch strikers and striker plates
Door latches
Door pillars
Door trim panels
Door wedges
Door window mechanisms
Frame
Seat airbags
Seat anchorages
Seat assemblies and adjusters
Seat belt anchorages
Seat belt assemblies
Sensor Diagnostic Module (SDM) and retainers/brackets
Side curtain airbag system (if equipped)
Upper interior trim including headliner

CMVSS 216 and FMVSS 216a – ROOF CRUSH RESISTANCE
Applies to all types of Incomplete Vehicles contained in this Document
with a 4536 kg (10,000 lb) GVWR or less

TYPE 3 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

Conformity with CMVSS 216 and FMVSS 216a cannot be determined based upon the components supplied on the incomplete vehicle, and General Motors makes no representation to conformity with the standard**.**

CMVSS 219 and FMVSS 219 – WINDSHIELD ZONE INTRUSION
Applies to all types of Incomplete Vehicles contained in this Document
with a 4536 kg (10,000 lb) GVWR or less

TYPE 2 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 219 and FMVSS 219 providing:

DRAFT

A. No alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems including but not limited to those listed below:

Antennae
Body roof structure and components/reinforcements
Body sheet metal components/reinforcements
Body structural components/reinforcements
Dash panel and cowl structure
Front, rear and side glazing materials and mounting
Hood assembly
Hood mounts
Motor compartment structure and components
Windshield wiper
Windshield wiper motor

B. The vehicle does not exceed the vehicle test weight specified in the FUEL ECONOMY AND EMISSIONS TABLE located within section PART II found later in this document.

C. During a 48 kph (30 mph) frontal barrier impact test:

1. No component installed by any intermediate or final stage manufacturer shall prevent the hood from folding in its designed folding pattern; and

2. No component installed by any intermediate or final stage manufacturer shall penetrate the windshield or protected zone.

CMVSS 220 and FMVSS 220 – SCHOOL BUS ROLLOVER PROTECTION
For all types of Incomplete Vehicles Contained in this Document using CMVSS 220 or FMVSS 220 as an Alternative Compliance procedure for CMVSS 216 or FMVSS 216a

TYPE 3 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

Conformity with CMVSS 220 and FMVSS 220 cannot be determined based upon the components supplied on the incomplete vehicle, and General Motors makes no representation to conformity with the standard**.**

FMVSS 225 – CHILD RESTRAINT ANCHORAGE SYSTEMS
Applies to all types of Incomplete Vehicles Contained in this Document 3855 kg (8,500 lb) GVWR or less

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document with seats installed by General Motors (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to FMVSS 225 provided the original equipment seats are not replaced, no seating positions are removed or added, and no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below:

Child restraint system including lower and top tether anchorages, seat brackets, plates and reinforcements
Access to top tether and lower anchorage systems
Floor pan assembly
Head restraints/head rests
Owner Manual instructions
Seat assemblies
Seat belt assemblies
Seat belt anchorage brackets, plates, and reinforcements
Seat belt routing
Seat position/adjustment capability

TYPE 3 The following statement is applicable to all types of incomplete vehicles contained in this document with seat or seat belt delete options in any seating position (unless otherwise noted on the cover).

Conformity with FMVSS 225 cannot be determined based upon the components supplied on the incomplete vehicle, and General Motors makes no representation to conformity with the standard**.**

DRAFT

CMVSS 226 and FMVSS 226 – EJECTION MITIGATION
Applies to all types of Incomplete Vehicles Contained in this Document 4536 kg (10,000 lb.) GVWR or less

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document, 4536 kg (10,000 lb.) GVWR or less (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to CMVSS 226 and FMVSS 226 providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below:

A, B, C pillar structure
Air bag system
Assist handles
Body structure
Door pads
Door structure
Headliner
Instrument panel
Roof structure
Seat adjusters
Seats, seat backs and head restraints
Seat air bag
Sensing diagnostic module (SDM)
Sunvisors
Upper interior trim
Window Glazing

CMVSS 301 and FMVSS 301 – FUEL SYSTEM INTEGRITY
Applies to all types of Incomplete Vehicles contained in this Document with a 4536 kg (10,000 lb) GVWR or less

TYPE 2 The following statement is applicable to B05 – Armored Vehicle, V4U – Limousine, or W30 – Short Stretch Livery types of incomplete vehicles contained in this document with a 4536 kg (10,000 lb) GVWR or less and a General Motors allowable unloaded vehicle weight of 2400 kg (5,290 lb) or less (unless otherwise noted on the cover).

This incomplete vehicle, when completed, including the installation of all General Motors supplied reinforcements per the **Cadillac Master Coachbuilders Guidelines Manual**, will conform to CMVSS 301 and FMVSS 301 provided it is completed in accordance with the following specific conditions by the (intermediate and) final stage manufacturer:

A. The following items when installed by General Motors will conform provided no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems including but not limited to those listed below:

Fuel filler door assembly
Fuel filter
Fuel hose shields
Fuel pipes and hose assemblies
Fuel system
Fuel system attaching or protective structure
Fuel system fasteners and retainers
Fuel tank assembly
Fuel tank cap assembly
Fuel tank filler neck hose
Fuel tank filler neck/pipe assembly
Fuel tank filler neck/pipe fasteners
Fuel tank filler neck/pipe hose clamp/clamp assembly
Fuel tank filler neck/pipe housing assembly
Fuel tank filler neck/pipe plate
Fuel tank filler neck/pipe vent hose
Fuel tank filler neck/pipe vent hose clamp/strap
Fuel tank meter assembly
Fuel tank shields
Fuel vapor lines and canister assembly

B. This incomplete vehicle, when completed, will conform to CMVSS 301 and FMVSS 301 Fuel System Integrity if:

1. No alterations are made to the fuel system and attaching or protective structure, the body structure, the chassis structure, the tires and wheels.

2. During all barrier impact tests:

DRAFT

a. No component installed by any intermediate or final stage manufacturer impinges or causes distortion to the fuel system with sufficient energy to puncture or separate the fuel system.

b. No vehicle modification by any intermediate or final stage manufacturer results in any portion of the vehicle impinging upon or causing distortion to the fuel system with sufficient energy to puncture or separate the fuel system. Care should be taken that the structural integrity of the vehicle is restored following any modification of the structure.

c. Any body installed by an intermediate or final stage manufacturer is mounted securely to absorb loads and prevent movement relative to the frame which could cause any fuel system component to be punctured, separated or otherwise damaged when tested to applicable procedures of CMVSS 301 or FMVSS 301.

TYPE 3 The following statement is applicable to option B9Q - Funeral Coach (unless otherwise noted on the cover).

Conformity with CVMSS 301 and FMVSS 301 cannot be determined based upon the components supplied on the incomplete vehicle, and General Motors makes no representation to conformity with the standard.

CMVSS 302 and FMVSS 302 - FLAMMABILITY OF INTERIOR MATERIALS
Applies to all types of Incomplete Vehicles contained in this Document

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

This incomplete vehicle, when completed will conform to CMVSS 302 and FMVSS 302 providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below:

All trim panels including door, front, rear and side panels
Arm rests
Compartment shelves
Console
Engine compartment covers
Floor coverings
Head restraints
Headlining
Instrument panel
Seat assemblies
Seat backs
Seat belts
Seat cushions
Shades
Sun visors
Wheel housing covers

NOTE: The list above also includes any other interior materials, such as padding and crash-deployed elements that are designed to absorb energy on contact by occupants in the event of a crash.

TYPE 3 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover). If the intermediate or final stage manufacturer installs any items but not limited to those listed above (examples: Curtains, Engine compartment cover, Mattress covers, Shades and Wheel housing covers, etc.), they must also meet the requirements of this CMVSS 302 and FMVSS 302.

Conformity with CMVSS 302 and FMVSS 302 cannot be determined based upon the components supplied on the incomplete vehicle, and General Motors makes no representation to conformity with the standard.

CMVSS 401 and FMVSS 401 – INTERNAL TRUNK RELEASE
Applies to all types of Incomplete Vehicles contained in this Document

TYPE 1 The following statement is applicable to B05 – Armored Vehicle, V4U – Limousine or W30 – Short Stretch types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

DRAFT

This incomplete vehicle, when completed will conform to CMVSS 401 and FMVSS 401 provided no alterations are made which affect the **function**, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems including but not limited to those listed below, and installed by General Motors:

Internal trunk release luminescent label
Internal trunk release manual release mechanism
Rear deck lid hinge and counterbalance mechanisms
Remote trunk release system
Trunk latch and striker system

TYPE 3 The following statement is applicable to B9Q – Funeral Coach type of incomplete vehicle contained in this document (unless otherwise noted on the cover).

Conformity with CMVSS 401 and FMVSS 401 cannot be determined based upon the components supplied on the incomplete vehicle, and General Motors makes no representation to conformity with the standard**.**

FMVSS 403 – PLATFORM LIFT SYSTEMS
Applies to all types of Incomplete Vehicles contained in this Document

TYPE 3 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

Conformity with FMVSS 403 cannot be determined based upon the components supplied on the incomplete vehicle, and General Motors makes no representation to conformity with the standard**.**

FMVSS 404 – PLATFORM LIFT INSTALLATIONS IN MOTOR VEHICLES
Applies to all types of Incomplete Vehicles contained in this Document

TYPE 3 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

Conformity with FMVSS 404 cannot be determined based upon the components supplied on the incomplete vehicle, and General Motors makes no representation to conformity with the standard**.**

DRAFT

PART II

U.S. EPA, CALIFORNIA, AND CANADIAN EXHAUST & EVAPORATIVE EMISSION REQUIREMENTS AND EPA/NHTSA GREENHOUSE GAS EMISSIONS/FUEL ECONOMY REGULATIONS

Incomplete vehicles come in three major classifications: (1) Light Duty Vehicles, Light Duty Trucks, and Heavy Duty Vehicles (Including Medium Duty in California) are certified by the primary manufacturer and the vehicle is labeled as being in compliance with emission and fuel economy requirements. (2) Heavy Duty Vehicles are required to have an engine certified by the engine manufacturer and bear an engine emissions label, and if a gasoline vehicle, bear an evaporative emissions label. (3) Light Duty Vehicles certified and labeled by the intermediate or final stage vehicle manufacturer as being in compliance with emission and fuel economy requirements.

In addition, all gasoline/gasoline-ethanol blend powered Federal/California Light Duty, Medium Duty and Heavy Duty Vehicles are required to have an approved fuel evaporative emission control system. Vehicles certified to Heavy Duty gasoline emission standards also require special evaporative emission labeling. In order to assure that Environmental Protection Agency (EPA), National Highway Traffic Safety Administration (NHTSA), California and Canada Emission Certification and/or Greenhouse Gas/Fuel Economy regulations are met, this vehicle must be completed in strict accordance with all instructions contained in this manual, especially the following instructions which relate to:

EMISSION RELATED COMPONENTS

TYPE 1 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

A. This incomplete vehicle, when completed, will conform to U.S. EPA, CALIFORNIA, AND CANADIAN EXHAUST & EVAPORATIVE EMISSION REQUIREMENTS AND EPA/NHTSA GREEENHOUSE GAS EMISSIONS/FUEL ECONOMY REGULATIONS providing the vehicle is completed in strict accordance with all statements included in this document, especially those that relate to: "EMISSION RELATED COMPONENTS, and no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the components, assemblies or systems, as manufactured by General Motors, including but not limited to those listed below (if equipped):

- Air Injection Reaction (AIR) System
- Axle
- Brake System
- Catalytic Converter
- Components for All Wheel Drive (AWD) System: axle, Power Take-Off Unit (PTU), propshaft
- Diesel Exhaust Emission Reduction Fluid (DEF) system, including, but not limited to: associated plumbing, fill neck assembly heated delivery line, heater, injector, level sensor, pump, sensors, tank temperature sensor
- Diesel Exhaust System, including, but not limited to: NOx Sensors, NOx Sensor Control Module, Diesel Exhaust (HCI) Direct Fuel Injector System, associated plumbing, injectors, injector controller and calibrations
- Diesel/Bio-Diesel blend Particulate Filter (DPF) system, including, but not limited to: diesel/bio-diesel blend particulate filter assembly diesel/bio-diesel blend oxidation catalyst assembly, exhaust system pressure differential assembly and/or plumbing, exhaust temperature sensor
- Engine Assembly, including, but not limited to: cooling fan and drive system, crankcase emission control system, evaporative emission control system, Exhaust Gas Recirculation (EGR) system, fuel delivery and injection system, glow plugs, Glow Plug Control Module (GPCM), ignition system, Positive Crankcase Ventilation (PCV) system
- Engine Electronics, including, but not limited to: coolant temperature sensor, ECM/GPCM/PCM/VCM, engine speed sensor, mass air flow sensor, calibrations/software
- Exhaust oxygen sensors
- Exhaust system
- Intake System, including, but not limited to: air induction components/system ducts, filter, mass air flow sensor, intake air heater
- Onboard Diagnostics Emission System
- Tires and Wheels
- Transaxle/Transmission Assembly
- Transaxle/Transmission Electronics, including, but not limited to: calibrations/software Transmission Control Module (TCM)
- Turbo Charging System, associated equipment and controls

DRAFT

B. The front and rear tires pressures must be inflated to the values shown in the FUEL ECONOMY AND EMISSIONS TABLE that appears below.

C. The Frontal Area and Vehicle Test Weight shown in the FUEL ECONOMY AND EMISSIONS TABLE that appears below must not be exceeded.

NOTES: All Federal/California gasoline/gasoline-ethanol blend powered heavy duty vehicles (except those equipped with option NJ2, Temporary Fuel Tank) will have an evaporative emission control system that is certified for a fuel tank capacity not to exceed the amount shown on the Vehicle Emission Control Information Label. Intermediate or Final Stage Manufacturers wishing to add fuel tank capacity beyond the original equipment fuel tank capacity must contact California Air Resources Board and/or submit a written statement to the EPA Administrator that the Hydrocarbon Storage System has been upgraded according to the requirements of 40 CFR 86.095-35 (g) (2).

Vehicles equipped with option NJ2 - Temporary Fuel Tank do not have an evaporative emission control system.

D. Further compliance with applicable fuel evaporative emission regulations will be maintained if no alterations are made to the fuel filler neck

Compliance with applicable fuel evaporative emission regulations will be maintained if no alterations are made to change material or increase the size or length or position of the following non-metallic fuel and evaporative emission hoses:

Fuel feed hoses front and rear
Fuel return hoses front and rear
Fuel tank filler hoses to filler neck
Fuel tank vent hoses to filler neck
Fuel vapor lines at canister
Fuel vapor lines from engine to chassis pipes
Fuel vapor lines from fuel tank sender to chassis pipes

E. This incomplete vehicle, when completed, will have an estimated fuel economy value determined in accordance with 40 CFR Part 600. This value is displayed on a fuel economy label prepared in accordance with the United States Environmental Protection Agency's fuel economy regulations by General Motors and furnished with this vehicle.

This incomplete vehicle, when completed, must not exceed the "Maximum Completed Vehicle Curb Weight" in the FUEL ECONOMY AND EMISSIONS TABLE shown below. To do so will invalidate the fuel economy value determined by the GM Powertrain – Emission Compliance and Certification Group, General Motors, and the emissions certification issued by the United States Environmental Protection Agency or the state of California, where applicable.

This incomplete vehicle, when completed, must not exceed the maximum body frontal area, listed below (specific per vehicle), and must not exceed the total Road Load Horsepower (RLHP) setting, listed below (per vehicle and weight class). To do so will invalidate the fuel economy value determined by the GM Powertrain – Emission Compliance and Certification Group, General Motors and the emissions certification issued by the United States Environmental Protection Agency or the state of California where applicable. RLHP setting and measuring procedures are described in Mobile Source Air Pollution Control Advisory Circular number 55c, for twin roll dynamometer procedures and EPA's Dear Manufacturer guidance letter VPCD-98-16 for single roll procedures, both of which are available from the United States Environmental Protection Agency.

DRAFT

FUEL ECONOMY AND EMISSIONS TABLE

Incomplete Vehicle Type	GM Tire Size	Cold Tire Pressure Front		Cold Tire Pressure Rear		Frontal Area		RLHP Setting		Vehicle Test Weight Class		Maximum Completed Vehicle Curb Weight	
		psi	kpa	psi	kpa	ft^2	m^2	hp	kw	kg	lb	kg	lb
W30	235-55-R18 Extra Load	36	250	36	250	25.8	2.398	14.9	11.0	2041	4,500	1957	4,325
W30	235-55-R18 Extra Load	36	250	36	250	25.8	2.398	15.2	11.2	2155	4,750	2075	4,575
W30	235-55-R18 Extra Load	36	250	36	250	25.8	2.398	15.5	11.4	2268	5,000	2188	4,825
W30	235-55-R18 Extra Load	36	250	36	250	25.8	2.398	15.7	11.5	2381	5,250	2302	5,075
W30	235-55-R18 Extra Load	36	250	36	250	25.8	2.398	16.1	11.8	2495	5,500	2468	5,450
B05	235-55-R18 Extra Load	42	290	42	290	25.8	2.398	16.3	12.0	2722	6,000	2699	5,950
V4U	235-55-R18 Extra Load	42	290	42	290	25.8	2.398	14.9	11.0	2155	4,750	2075	4,575
V4U	235-55-R18 Extra Load	42	290	42	290	25.8	2.398	15.2	11.2	2268	5,000	2188	4,825
V4U	235-55-R18 Extra Load	42	290	42	290	25.8	2.398	15.4	11.3	2381	5,250	2302	5,075
V4U	235-55-R18 Extra Load	42	290	42	290	25.8	2.398	15.8	11.6	2495	5,500	2472	5,450
V4U	235-55-R18 Extra Load	42	290	42	290	25.8	2.398	16.3	12.0	2722	6,000	2699	5,950
B9Q	235-55-R18 Extra Load	42	290	42	290	30.3	2.816	17.2	12.7	2155	4,750	2075	4,575
B9Q	235-55-R18 Extra Load	42	290	42	290	30.3	2.816	17.4	12.8	2268	5,000	2188	4,825
B9Q	235-55-R18 Extra Load	42	290	42	290	30.3	2.816	17.7	13.0	2381	5,250	2302	5,075
B9Q	235-55-R18 Extra Load	42	290	42	290	30.3	2.816	18.0	13.2	2495	5,500	2472	5,450
B9Q	235-55-R18 Extra Load	42	290	42	290	30.3	2.816	18.5	13.6	2722	6,000	2699	5,950

NOTES: The “Vehicle Test Weight” (shown above) includes the weight of a vehicle with standard equipment, oil, lubricants, coolant and a full tank of fuel also including 136 kg (300 lb) to allow for the weight of two 68 kg (150 lb) passengers.

“Vehicle Curb Weight” (shown above) is defined as the weight of a “completed vehicle” with standard equipment, oil, lubricants, coolant and a full tank of fuel. Note: This definition may differ from definitions used by governmental regulatory agencies.

DRAFT

SPECIFICATION FOR FILL PIPES AND OPENINGS OF 2016 AND SUBSEQUENT MODEL MOTOR VEHICLE FUEL TANKS (APPLICABLE ONLY TO CALIFORNIA GASOLINE/GASOLINE-ETHANOL BLEND POWERED VEHICLES)

TYPE 2 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to Title 13, California Code of Regulations Section 2235, and the "Specifications for Fill Pipes and Openings of 2015 and subsequent Model Year Motor Vehicle Fuel Tanks", dated March 22, 2012, providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the fuel filler neck.

LABELS

TYPE 2 The following statement is applicable to all types of incomplete vehicles contained in this document (unless otherwise noted on the cover).

This incomplete vehicle, when completed, will conform to U.S. EPA, CALIFORNIA, AND CANADIAN EXHAUST & EVAPORATIVE EMISSION REQUIREMENTS AND EPA/NHTSA GREENHOUSE GAS EMISSIONS/FUEL ECONOMY REGULATION labeling requirements providing no alterations are made which affect the function, physical, chemical, or mechanical properties, environment, location or vital spatial clearances of the Emission Control related Information Labels that are permanently affixed. The labels are required by government regulation and must not be obstructed from view or defaced to impair their visibility or legibility. In addition, an EPA/DOT Fuel Economy and Environment Label may be affixed to the window glass of the incomplete vehicle as manufactured by General Motors. If equipped, the label must remain in place until the ultimate customer receives this vehicle.

DRAFT

NOTES

DRAFT

DRAFT

DRAFT